


TECHNICAL SPECIFICATIONS

EVERVIEW SCREEN FABRIC

features and benefits

- available in 2.34metre and 3.2metre[◊] Widths
- 24 colours
- Suitable applications include:
 - Alpha Straight Drop Awnings
 - Standard Automatic Awnings
 - System 2000 Awnings

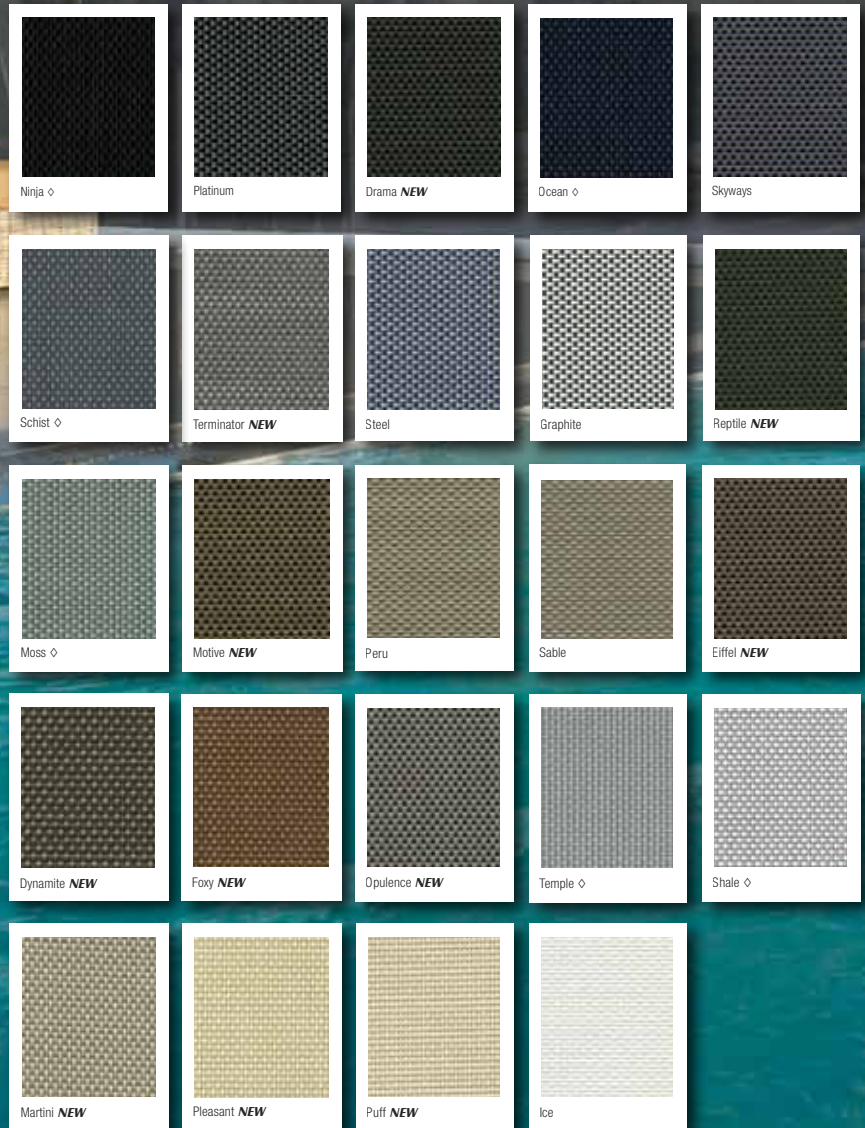

Note: Colours are as accurate as the printing process allows. ◊ 3.2metre fabric width is only available in these colours.

Everview Screen Fabric

Introducing a new range of external mesh fabrics from Hunter Douglas Limited. Available in 2.34m and 3.2m^Ø wide fabric allows wider width products to be covered without fabric joins. Combined with a 2 x 2 weave construction which provides great strength and stability even when the fabric is railroaded (turned sideways). With a designer textured colour range including metallic, naturals, clear and standard yarns, you can find a unique fabric to suit almost any exterior decor.

featuresandbenefits

100% PVC Coated Polyester
Superior Fabric Coating

24 Colours

Utilising a textured colour range including metallic, clear and standard yarns offers users unique and contemporary colour palette.

Light Filtering

All colours in the range are light filtering.

Water Resistant

Everview Screen Fabric is water resistant for improved resilience in all environmental conditions.

UV Resistant

All colours meet Australian Standards for colour fastness to resist fading.

Fire Retardancy

Suitable for a range of commercial applications including the new Alpha Straight Drop Awning range, Automatic Awnings and System 2000 Awnings.

VOCs

Everview Screen Fabric has been tested and does not exceed the maximum VOC (Volatile Organic Compound) criteria specified by the Green Building Council of Australia (IEQ-11).

COLOUR	Ts	Rs	As	TL	RL	AL	TUV	Sc	Heat Protection	Glare Reduction	Shade Factor	UV Protection
Ocean	10	5	85	15	6	79	10	0.74	◆◆◆◆	◆	◆◆◆◆	◆◆◆◆
Ninja	9	3	88	15	4	81	9	0.75	◆◆◆◆	◆	◆◆◆◆	◆◆◆◆
Moss	11	25	64	16	29	55	9	0.61	◆◆◆◆	◆	◆◆◆◆	◆◆◆◆
Shale	14	46	40	17	49	34	9	0.47	◆◆◆◆	◆	◆◆◆◆	◆◆◆◆
Schist	9	4	87	15	6	79	9	0.75	◆◆◆◆	◆	◆◆◆◆	◆◆◆◆
Platinum	15	10	75	21	11	68	10	0.72	◆◆◆◆	◆◆	◆◆◆◆	◆◆◆◆
Steel	11	23	66	16	24	60	9	0.62	◆◆◆◆	◆◆◆◆	◆◆◆◆	◆◆◆◆
Graphite	15	38	47	20	40	40	11	0.53	◆◆◆◆	◆◆◆◆	◆◆◆◆	◆◆◆◆
Peru	13	30	57	18	30	52	10	0.58	◆◆◆◆	◆◆◆◆	◆◆◆◆	◆◆◆◆
Sable	13	29	58	18	29	53	11	0.59	◆◆◆◆	◆◆◆◆	◆◆◆◆	◆◆◆◆
Temple	12	34	54	16	35	49	10	0.55	◆◆◆◆	◆◆◆◆	◆◆◆◆	◆◆◆◆
Ice	30	60	10	32	61	70	10	0.41	◆◆◆◆	◆	◆◆	◆◆◆◆

Solar Optical Properties Guide

- TS - Heat Transmittance (%)
- RS - Heat Reflectance (%)
- AS - Heat Absorbance (%)
- TL - Light Transmittance (%)
- RL - Light Reflectance (%)
- AL - Light Absorbance (%)
- TUV - Ultraviolet Transmittance (%)
- SC - Shading Coefficient

COMFORT RATING# Guide

- ◆◆◆◆ Highest level of protection/performance
- ◆◆◆ High level of protection/performance
- ◆◆◆ Medium level of protection/performance
- ◆◆ Low level of protection/performance
- ◆ No protection

COMFORT RATING has been devised by Hunter Douglas Limited with the assistance of Canesis Pty Ltd - an Independent Australian Fibre and Textile Research and Development Company.



Heat Protection Insulation



Shade Factor



Glare Reduction



UV Protection

Fire Retardancy Information

Complies with the General Requirements of the Building Code of Australia for Fire Hazard Properties of materials in buildings. Not suitable for use in parts of buildings with Special Requirements, i.e. fire isolated exits; public corridors leading to a fire isolated stairway, passageway or ramp; a patient care area of health care buildings; and in a public assembly building (e.g. theatre or hall) not protected with a sprinkler system.

Fire Retardant Ignitability Index [Range 0-20]	17	Heat Evolved Index [Range 0-10]	4
Spread of Flame Index [Range 0-10]	7	Smoke Developed Index [Range 0-10]	8

HunterDouglasCommercial

WINDOW COVERINGS

To see how Hunter Douglas Commercial Window Coverings can transform your next project call 1300 733 078.

www.hunterdouglascommercial.com.au

© Copyright 2011 Hunter Douglas Limited (ABN 98 009 675 709). ©Registered Trade Marks of Hunter Douglas Limited.